




CUSTOMER'S MODEL NO.:

CUSTOMER APPROVED:

DATE:

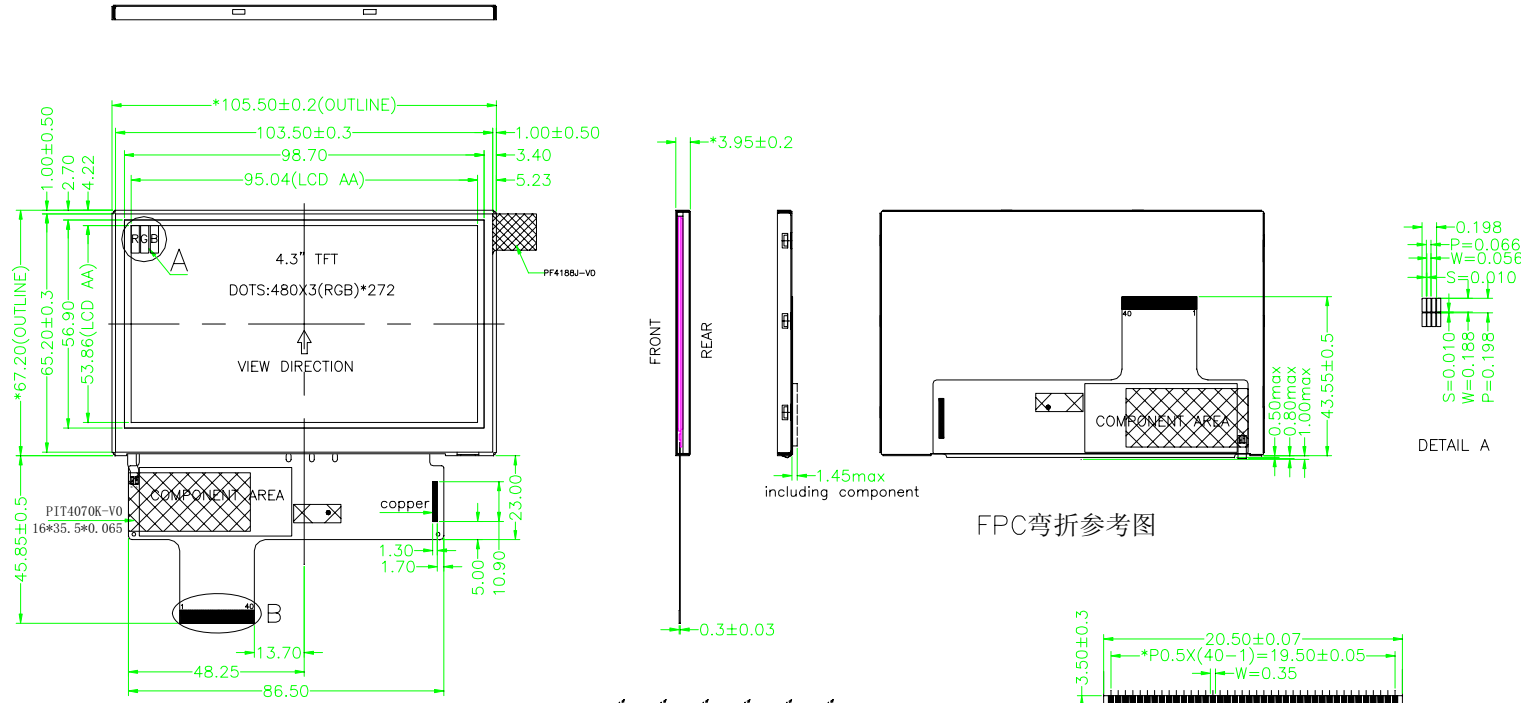


PIN FUNCTION

PIN	description
1	VLED-
2	VLED+
3	GND
4	VDD
5	RO
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	AVDD
36	GND
37	XR
38	YD
39	XL
40	YU

展开出货

FPC弯折参考图

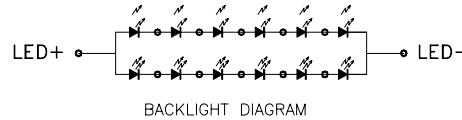

DETAIL B SCALE 4:1  
TYPE:FH19S-40S-0.5SH(51)

NOTES:

1. DISPLAY TYPE:TFT
2. VIEWING DIRECTION :6.0'CLOCK
3. POLARIZER: TRANSMISSIVE/POSITIVE
4. OPERATING TEMP: -20°C ~70°C
5. STORAGE TEMP : -30°C ~80°C
6. IC: COG HX8227 2PCS, HX8655 1PCS
7. GENERAL TOLERANCE: ±0.2
8. \* KEY DIMENSION
9. ALL MATERIALS MUST BE BHS-001 COMPLIANT

REVISION RECORD		DATE	MULTI-INNO TECHNOLOGY CO.,LTD.	
1			TITLE: LCM OUTLINE DIMENSION	D/N : MI0430ET
2			FILE NAME : 模组图	Rev. : 0 P/N :
3			FILE NO. :	Ver. : A SCALE : N.T.S.
4			DRAWN BY	DATE UNIT : mm
5			CHECKED BY	DATE PRO.(3):
6			CHECKED BY	DATE SHEET : 1/1